

CM-30S-96



Chain Mount Kit, 8 ft chain, includes pipe

Product Classification

Product Type Chain mount kit

General Specifications


Chains, quantity 2
Pipe, quantity 1
Sectors, quantity 1

Dimensions

Height 152.4 mm | 6 in
Width 203.2 mm | 8 in
Length 2,438.4 mm | 96 in
Chain Length 2,400.3 mm | 94.5 in
Pipe Length 2,438.4 mm | 96 in
Mounting Diameter, maximum 762 mm | 30 in
Mounting Diameter, minimum 203.2 mm | 8 in
Pipe Outer Diameter 60.96 mm | 2.4 in
Mounting Circumference, maximum 2,392.68 mm | 94.2 in
Mounting Circumference, minimum 635 mm | 25 in

CM-30S-96

Outline Drawing

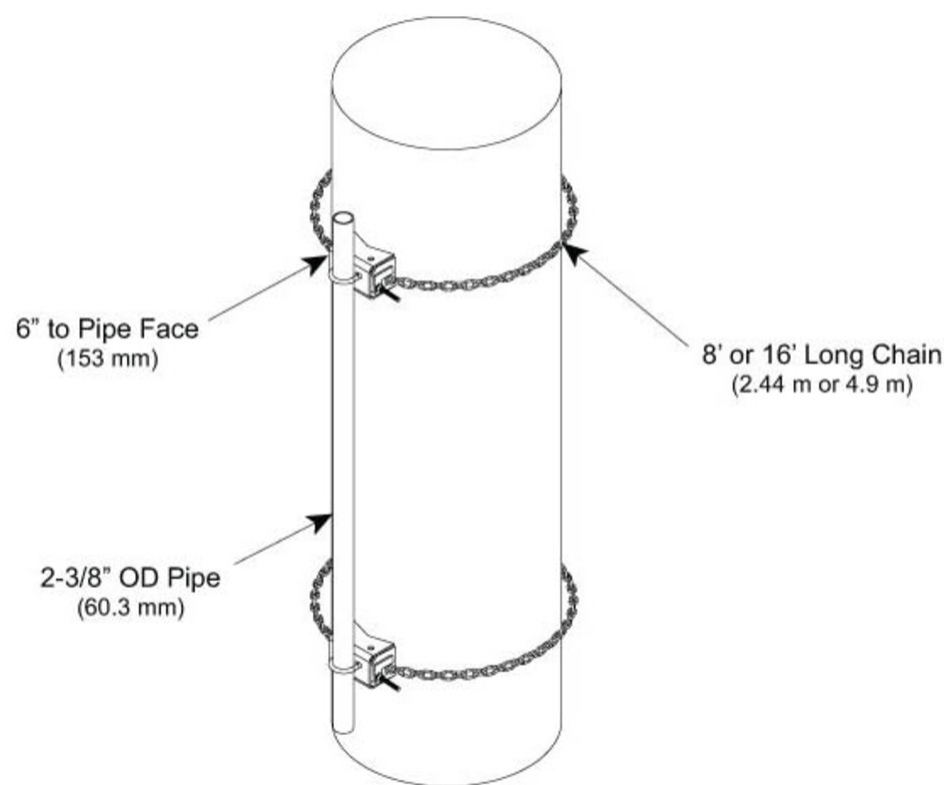

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating 120 mph (BWS) at 100 ft AGL

Wind Rating Criteria One 96 in x 10 in panel antenna per sector

Wind Rating Test Method TIA/EIA-222

Packaging and Weights

Included Chains | Plain end pipes

Packaging quantity 1

Weight, net 27.3 kg | 60.186 lb

CM-30S-96

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Included Products

CM-30S-B	- Chain Mount Base Kit, 14 in stand-off, 8 ft chain
MT-651-96	- Plain End Pipe, 2-3/8 in OD x 96 in .120" A500C 46Ksi

* Footnotes

Wind Rating	BWS—Base Wind Speed; FBC—Florida Building Code
-------------	--

CM-30S-B



Chain Mount Base Kit, 14 in stand-off, 8 ft chain

Product Classification

Product Type Chain mount kit

General Specifications


Chains, quantity 2
Pipe, quantity 0
Sectors, quantity 1

Dimensions

Height 152.4 mm | 6 in
Width 203.2 mm | 8 in
Length 203.2 mm | 8 in
Chain Length 2,400.3 mm | 94.5 in
Mounting Diameter, maximum 762 mm | 30 in
Mounting Diameter, minimum 203.2 mm | 8 in
Pipe Outer Diameter 60.96 mm | 2.4 in
Mounting Circumference, maximum 2,392.68 mm | 94.2 in
Mounting Circumference, minimum 635 mm | 25 in

CM-30S-B

Outline Drawing

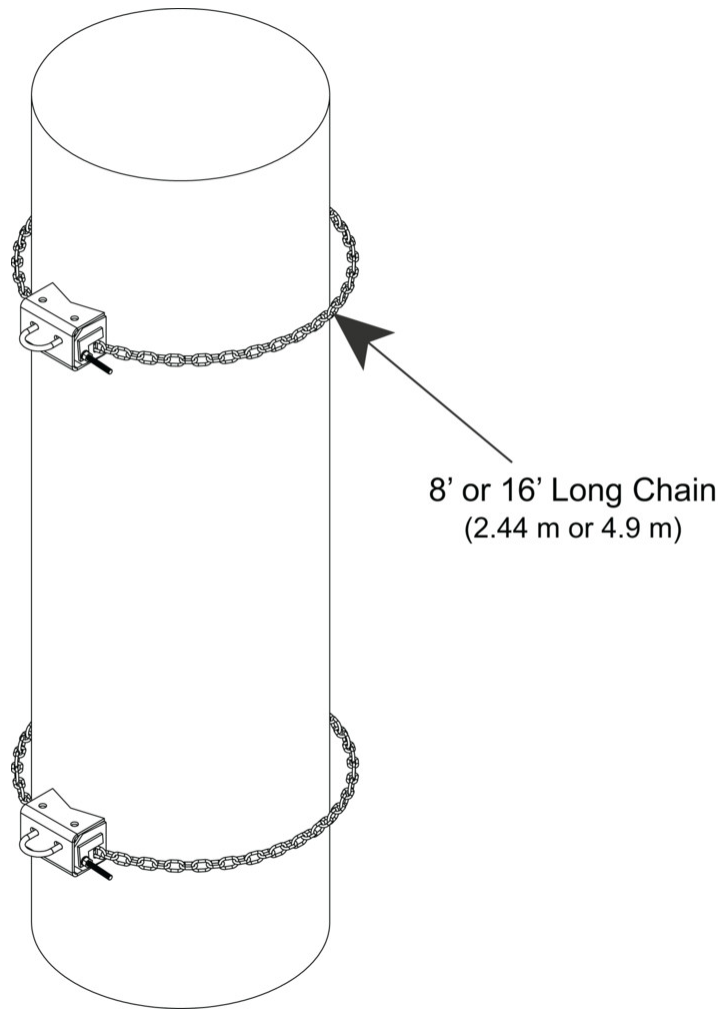

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating 120 mph (BWS) at 100 ft AGL

Wind Rating Criteria One 96 in x 10 in panel antenna per sector

Wind Rating Test Method TIA/EIA-222

Packaging and Weights

Included Brackets | Chains | Hardware

CM-30S-B

Packaging quantity	1
Weight, net	31.8 kg 70.107 lb


Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

* Footnotes

Wind Rating	BWS—Base Wind Speed; FBC—Florida Building Code
-------------	--

MT-651-96



Plain End Pipe, 2-3/8 in OD x 96 in .120" A500C 46Ksi

Product Classification

Product Type Plain end pipe

General Specifications

Pipe, quantity 1

Dimensions

Height 60.96 mm | 2.4 in
Width 60.96 mm | 2.4 in
Length 2,438.4 mm | 96 in
Pipe Length 2,438.4 mm | 96 in
Pipe Outer Diameter 60.325 mm | 2.375 in
Material Thickness 3.048 mm | 0.12 in

Material Specifications

Material Type A500 | Hot dip galvanized steel
Material Grade C
Material Strength 46 KSI

Packaging and Weights

Included Pipe
Packaging quantity 1
Weight, net 10 kg | 22.046 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

MT-651-96

ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted

