

CM-606-96



Chain Mount Kit, 16 ft chain, includes pipe

Product Classification

Product Type Chain mount kit

General Specifications


Chains, quantity 2
Pipe, quantity 6
Sectors, quantity 6

Dimensions

Height 152.4 mm | 6 in
Width 203.2 mm | 8 in
Length 2,438.4 mm | 96 in
Chain Length 4,902.2 mm | 193 in
Pipe Length 2,438.4 mm | 96 in
Mounting Diameter, maximum 1524 mm | 60 in
Mounting Diameter, minimum 355.6 mm | 14 in
Pipe Outer Diameter 60.96 mm | 2.4 in
Mounting Circumference, maximum 4,775.2 mm | 188 in
Mounting Circumference, minimum 1,117.6 mm | 44 in

CM-606-96

Outline Drawing

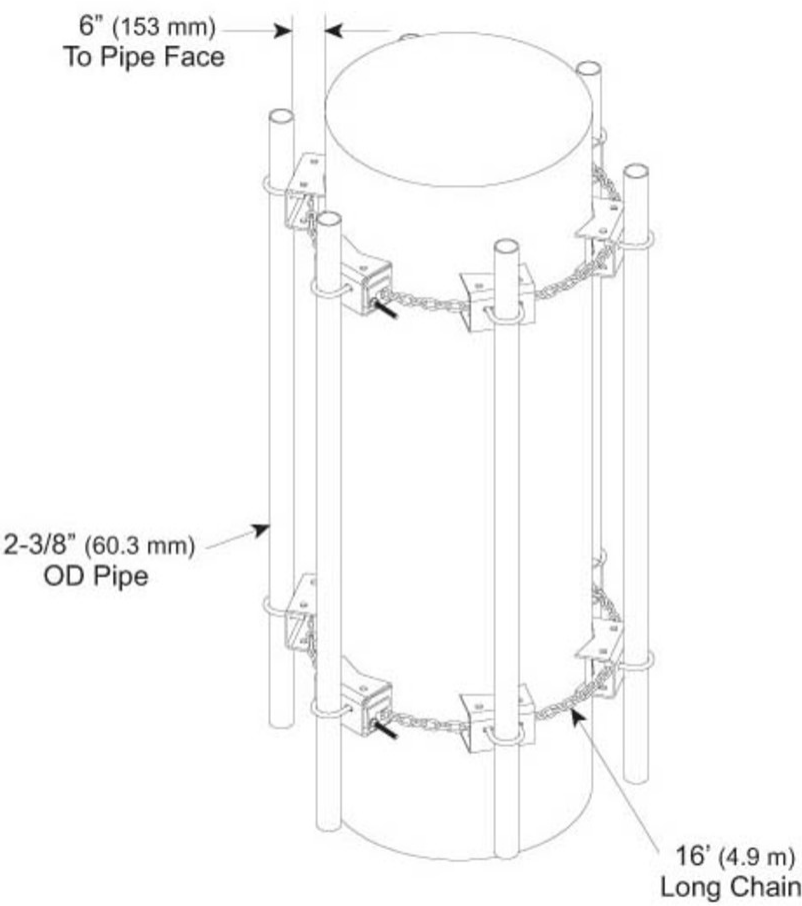

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating 120 mph (BWS) at 100 ft AGL

Wind Rating Criteria One 96 in x 10 in panel antenna per sector

Wind Rating Test Method TIA/EIA-222

Packaging and Weights

Included Chains | Plain end pipes

CM-606-96

| | |
|--------------------|-----------------------|
| Packaging quantity | 1 |
| Weight, net | 124.7 kg 274.916 lb |

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

Included Products

| | |
|-----------|---|
| CM-606-B | – Chain Mount Base Kit, 14 in stand-off 16 ft chain |
| MT-651-96 | – Plain End Pipe, 2-3/8 in OD x 96 in .120" A500C 46Ksi |

* Footnotes

| | |
|-------------|--|
| Wind Rating | BWS—Base Wind Speed; FBC—Florida Building Code |
|-------------|--|

CM-606-B



Chain Mount Base Kit, 14 in stand-off 16 ft chain

Product Classification

Product Type Chain mount kit

General Specifications


Chains, quantity 2
Pipe, quantity 0
Sectors, quantity 6

Dimensions

Height 152.4 mm | 6 in
Width 203.2 mm | 8 in
Length 203.2 mm | 8 in
Chain Length 4,902.2 mm | 193 in
Mounting Diameter, maximum 1524 mm | 60 in
Mounting Diameter, minimum 355.6 mm | 14 in
Pipe Outer Diameter 60.96 mm | 2.4 in
Mounting Circumference, maximum 4,775.2 mm | 188 in
Mounting Circumference, minimum 635 mm | 25 in

CM-606-B

Outline Drawing

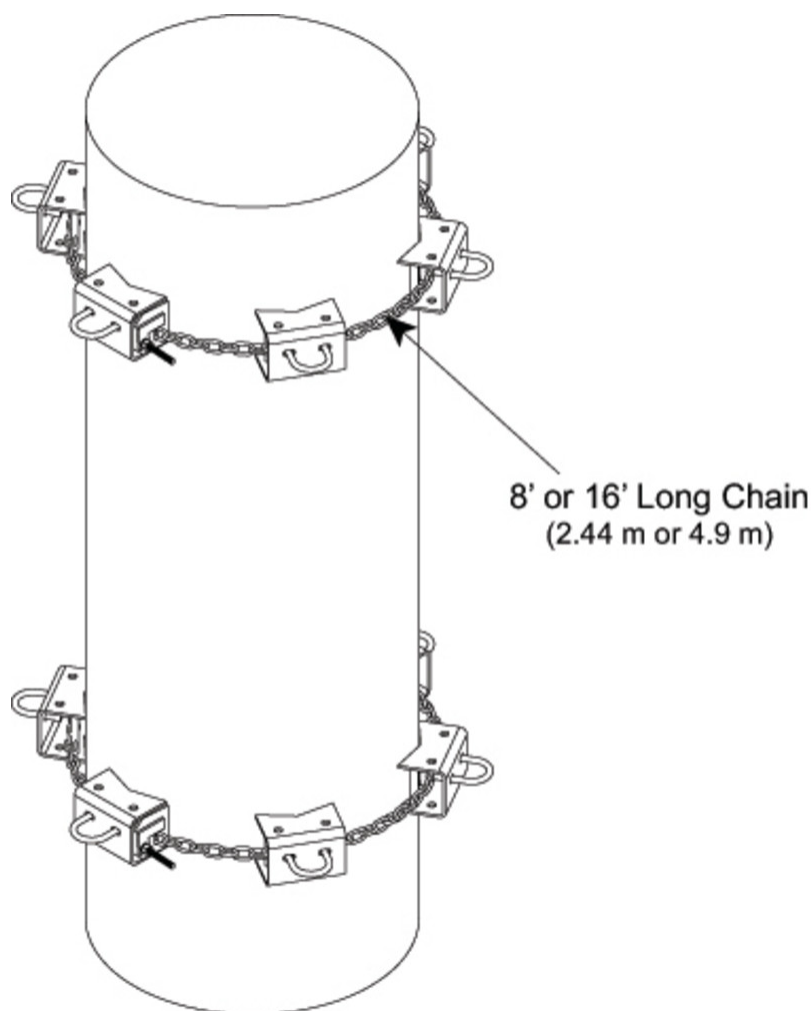

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating 120 mph (BWS) at 100 ft AGL

Wind Rating Criteria One 96 in x 10 in panel antenna per sector

Wind Rating Test Method TIA/EIA-222

Packaging and Weights

Included Brackets | Chains | Hardware

CM-606-B

| | |
|--------------------|---------------------|
| Packaging quantity | 1 |
| Weight, net | 36.3 kg 80.028 lb |


Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

* Footnotes

| | |
|-------------|--|
| Wind Rating | BWS—Base Wind Speed; FBC—Florida Building Code |
|-------------|--|

MT-651-96



Plain End Pipe, 2-3/8 in OD x 96 in .120" A500C 46Ksi

Product Classification

Product Type Plain end pipe

General Specifications

Pipe, quantity 1

Dimensions

Height 60.96 mm | 2.4 in
Width 60.96 mm | 2.4 in
Length 2,438.4 mm | 96 in
Pipe Length 2,438.4 mm | 96 in
Pipe Outer Diameter 60.325 mm | 2.375 in
Material Thickness 3.048 mm | 0.12 in

Material Specifications

Material Type A500 | Hot dip galvanized steel
Material Grade C
Material Strength 46 KSI

Packaging and Weights

Included Pipe
Packaging quantity 1
Weight, net 10 kg | 22.046 lb

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Above maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

MT-651-96

| | |
|---------|--------------------|
| ROHS | Compliant/Exempted |
| UK-ROHS | Compliant/Exempted |

