

SFG23HDX-14-3-126



G23HDX High Capacity Sector Frame, 14.5 ft x 2.88 in OD face pipes, includes three 2.88 OD 126 in pipes; For patents, see www.cs-pat.com

OBSOLETE

This product was discontinued on: March 22, 2023

Replaced By:

SFG23HDX-14-4-126 G23HDX High Capacity Sector Frame, 14.5 ft x 2.88 in OD face pipes, includes four 2.88 OD x 126 in antenna pipes

Product Classification

Product Type High capacity Tower sector frame


General Specifications

Application 4G LTE antenna/radio mount
Mounting Angle 60°, 203.2 mm (8 in) | Straight or tapered legs up to 203.2 mm (8 in) OD
Patent Number Patent pending
Pipe, quantity 3
Tower Taper Non-tapered | Tapered

Dimensions

Height 3,200.4 mm | 126 in
Face Width 4.42 m | 14.5 ft
Width 4,419.6 mm | 174 in
Pipe Length 3,200.4 mm | 126 in
Face Support Pipe Diameter 73.025 mm | 2.875 in
Mounting Diameter, maximum 218.44 mm | 8.6 in
Mounting Diameter, minimum 38.1 mm | 1.5 in
Pipe Outer Diameter 73.025 mm | 2.875 in
Stand-off Distance 1,239.52 mm | 48.8 in

Outline Drawing

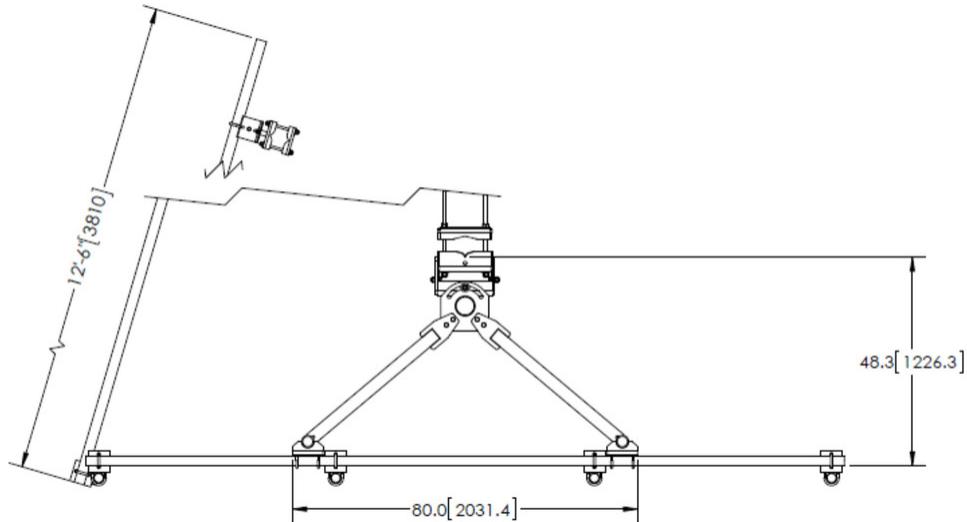

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating For Specifications, please contact your local ANDREW representative

Wind Rating Test Method TIA/EIA-222-G

Packaging and Weights

Included Frame | Pipe mounts | Plain end pipes (3) | Stiff arm | Tower attachment

Packaging quantity 1

Weight, net 387.821 kg | 855 lb

Regulatory Compliance/Certifications

Agency

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

* Footnotes

Wind Rating BWS—Base Wind Speed; FBC—Florida Building Code